


BF10.10LA

Lavoce

1" COMPRESSION DRIVER

FERRITE MAGNET


-
- 1 INCH CCAW VOICE COIL
 - 106 dB/SPL SENSITIVITY
 - 40 W PROGRAM POWER HANDLING
 - FEM OPTIMIZED MOTOR, PHASEPLUG AND DIAPHRAGM
 - 2500 – 18000 Hz FREQUENCY RANGE
 - ALUMINIUM DIAPHRAGM

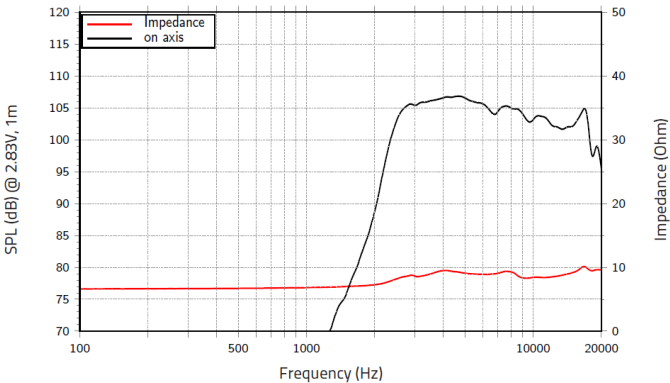

GENERAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Nominal Impedance	8 ohm
Minimum Impedance	7.5 ohm
Program Power	40 W Program power is defined as 3 dB greater than AES Power.
AES Power Rating	20 W Tested 2h with continuous, band-limited (5000–20000 Hz, 12dB/oct.) pink noises as per AES 2–1984 Rev. 2003.
Sensitivity	106 dB Measured on axis at 2.83V, 1m, SPL averaged in the frequency range 2500 ÷ 18000 Hz.
Frequency Range	2500÷18000 Hz
Voice Coil Diameter	25.4 mm (1 in)
Magnet Material	FERRITE
Coil Material	CCA W
Former Material	KAPTON
Diaphragm Geometry	ANNULAR
Diaphragm	ALUMINIUM
Surround Material	ALUMINIUM
Magnet OD	72 mm (2.8 in)
Voice Coil Inductance	0.03 mH
Flux Density	1.5 T
Recommended Crossover	5000 Hz High pass filter with slope 12dB/oct. or higher.
Driver Displacement Volume	0.2 l (0.007 ft³)

DIMENSIONS

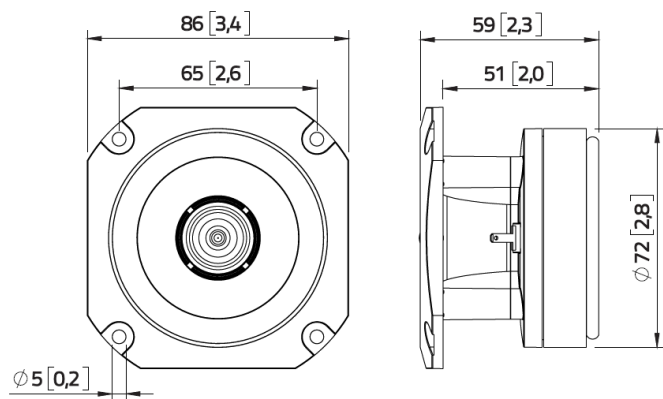

SHIPPING INFORMATION

Net Weight	0.6 kg (1.323 lb)
Multipack Quantity	12
Multipack size W x D x H	375 mm x 290 mm x 180 mm (14.8 in x 11.4 in x 7.1 in)
Multipack Weight	8.4 kg (18.52 lb)

REPAIR KITS

HF Repair Kit	VRK33100
---------------	----------

