


DF10.101L

Lavoce

1" COMPRESSION DRIVER

FERRITE MAGNET


- 1 INCH CCAW VOICE COIL
- 107 dB/SPL SENSITIVITY
- 40 W PROGRAM POWER HANDLING
- FEM OPTIMIZED MOTOR, PHASEPLUG AND DIAPHRAGM
- 1500 - 18000 Hz FREQUENCY RANGE
- HIGH TEMPERATURE POLYMERIC DIAPHRAGM

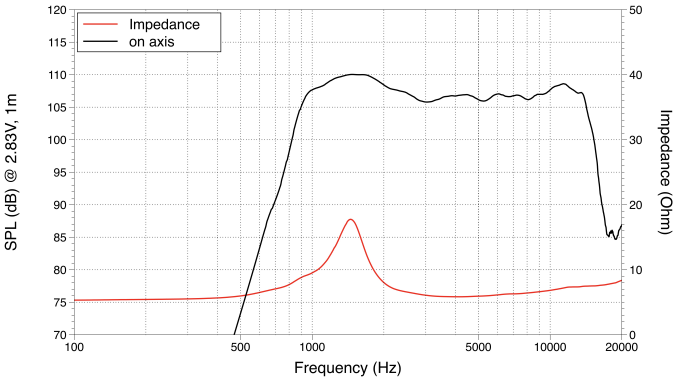

GENERAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Nominal Impedance	8 ohm
Minimum Impedance	6 ohm
Program Power	40 W Program power is defined as 3 dB greater than AES Power.
AES Power Rating	20 W Tested for 2h with continuous, band-limited (2500-20000 Hz, 12dB/oct.) pink noise signal as per AES 2-1984 Rev. 2003.
Sensitivity	107 dB Measured on axis at 2.83V, 1m, driver loaded with HD1003 horn, SPL averaged in the frequency range 1500 ÷ 18000 Hz.
Frequency Range	1500÷18000 Hz
Voice Coil Diameter	25.4 mm (1 in)
Magnet Material	FERRITE
Coil Material	CCA W
Former Material	KAPTON
Diaphragm Geometry	DOM E
Diaphragm	HT POLYMER VENTED
Surround Material	HIGH TEMPERATURE POLYMER
Magnet OD	85 mm (3.3 in)
Voice Coil Inductance	0.03 mH
Flux Density	1.5 T
Recommended Crossover	2500 Hz High pass filter with slope 12dB/oct. or higher.
Driver Displacement Volume	0.2 l (0.007 ft³)

DIMENSIONS

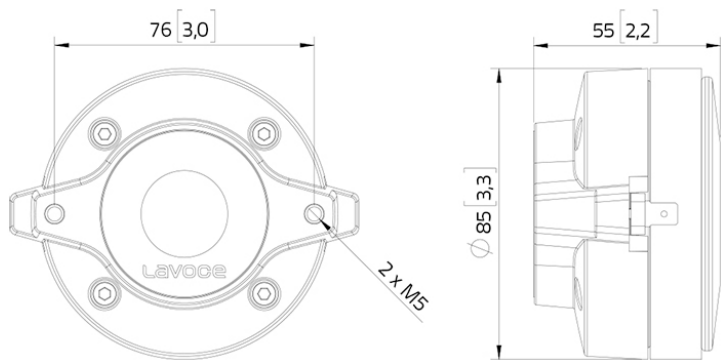

SHIPPING INFORMATION

Net Weight	0.8 kg (1.764 lb)
Multipack Quantity	12
Multipack size W x D x H	510 mm x 425 mm x 100 mm (20.1 in x 16.7 in x 3.9 in)
Multipack Weight	11.5 kg (25.35 lb)

REPAIR KITS

HF Repair Kit	VRK03100
---------------	----------

